

DESIGN

The MILLENIUM range of attractive ergonomically-designed rotisseries, boasts a number of innovative features for increased functionality and are an ideal show-piece used throughout the world in hotels, restaurants and deli stores.

The electrical heating elements provide an even distribution of heat throughout the unit with 3 different heat settings - offering you the flexibility to cook as little or as much as you need.

Spits are driven by individual motors rotating at 2 ¹/₂ times per minute allowing meat or poultry to constantly baste itself, sealing in natural juices and cooking to perfection.

FEATURES


- Energy Efficient
- □ Independent motors
- □ 2 tempered glass doors
- □ Reinforced heating elements
- Equipped with bottom drip tray with drainage tap
- □ Powerful halogen lamp

FINISHES

Standard model in black enamel. A choice of other colours are available. Choses a colour scheme for Millenium.



With chrome or brass trims.

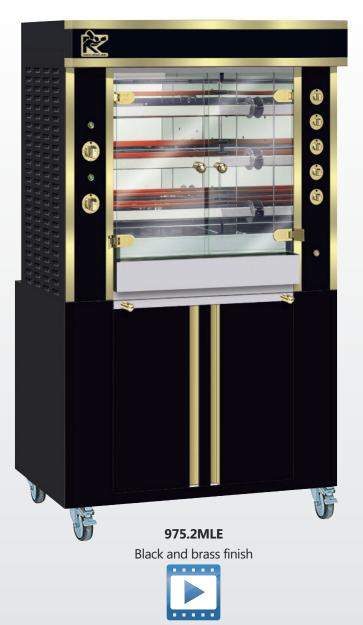

ACCESSORIES

A variety of accessories are available for the unit. Video of available accessories and video of vertical spit system.

CUI975 Anti-cutting prongless spit.		BP975 Chicken spit.	++++	BRC975 Basket spit.	
BS975 Sabre spit for ham / turkey.	+++	BRRO975 Roast-clamp spit.	-	BA975 Lamb/suckling- pig spit. On demand.	×
GCP975 Spare rib rack.		GSV975 Raised rack for meat storage.		PID975 Stainless steel tray to unspit.	



800 775

760

760

•

MILLENIUM 975.2MLE/MSE + i

Front view Rotisserie with roof (optional) and base on casters (optional)

980

<u> ROTISSERI</u>E

1025

975

975

÷

•

•

•

•

0

(lamps 2x25W)

Illuminated Sign

Protective Roof (Optional)

GRANDES FLAMMES

MILLENIUM

securit glass

Caster Base

(Optional)

Heated Base Cabinet (1,055kW)

or Base Cabinet

(Optional)

Electrical

Connection, in rear

doors

(Optional)

Side view Rotisserie with roof (optional) and base on casters (optional)

8

640

500

570

605

570


605

N)

A)

140

Top view Rotisserie with roof (optional) and base on casters (optional)





SPECIFICATIONS

Electricity	400 V 3 phases + neutral + earth 8.3 kW		
Electrical connection	wire length 2 meters		
Capacity	4/6 poultries (depending on size)		
Warranty	1 year on parts (excluding glass doors)		
Extraction	Compulsory		
Minimum clearance	5 cm on the left and right, 5 cm at the rear		
Weight	55 kg without packing		

Revised : June 2014

DISTRIBUTOR / AGENT

Rotisol S.A.S.

Zone industrielle La Trentaine, Avenue Gustave Eiffel 77507 Chelles cedex - FRANCE <u>s.bennell@rotisol.com</u> - Tel : +33 1 64 21 80 00 www.rotisol.com